


# Napkin Laminator

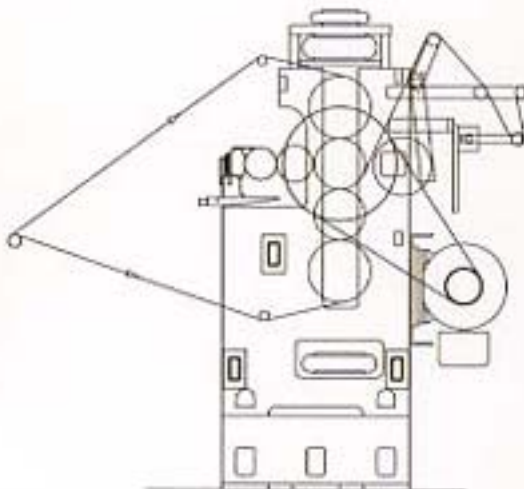

## Standard:

- Pneumatic or hydraulic loading
- Electronic drive allows easy integration into existing lines
- Bowed rolls
- Closed cavity doctor blade glue application system

## Production Speed up to:

- 1800 feet per minute
- 550 meters per minute

## Embossing\*:

- Point-to-point
- Nested embossing
- \* Capable of both, depending on engraving and options chosen

## Embossing Nip Linear

Pressure: Maximum:

- 250 p.l.i.
- 45 kg/cm

## Product Configuration

Options:

Two Ply:

- two laminated and embossed webs
- one embossed web laminated to one unembossed web

Options:

- Marriage roll for nested embossing (point-to-point is base)
- Web cleaning system-dust removal



**C. G. Bretting Manufacturing Co., Inc.**

3401 Lake Park Road • Ashland, WI 54806

Tel: 715.682.5231 • Fax: 715.682.4138

E-mail: sales@bretting.com • www.bretting.com